


Cost efficient solution in IP20



(Figure similar)

Figure	Type	Inputs digital	Outputs digital	Input voltage (sensor supply) <sup>(1)</sup>	Output voltage (actuator supply) <sup>(2)</sup>	Periphery connection	ASi/AUX connection <sup>(3)</sup>	ASi address <sup>(4)</sup>	Article No.
	22,5 mm x 99,0 mm x 114,5 mm, 6 x 4 contacts	8	8 x electronic	out of AUX	out of AUX	push-in terminals	push-in terminals	2 AB addresses	<b>BWU4265</b>


- (1) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (2) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (3) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).
- (4) **ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed. For modules with two ASi nodes the 2nd ASi node is turned off as long as the 1st ASi node is addressed to address "0". Upon request, ASi nodes are available with specific ASi node profiles.


<b>Article no.</b>		<b>BWU4265</b>
<b>General data</b>		
Device type		input / output
<b>Connection</b>		
ASi / AUX connection		push-in terminals
Periphery connection		push-in terminals
Primary application		control cabinet
Length of connector cable		I/O: unlimited <sup>(1)</sup>
<b>ASi</b>		
Profile		ASi node 1: S-7.A.7, ID1=7 (fixed), ASi node 2: S-7.A.7, ID1=6 (default)
Address		2 AB addresses
Required Master profile		≥M4
Since ASi specification		3.0
Operating voltage		30 V (18 ... 31.6 V)
Max. current consumption		60 mA
Max. current consumption without sensor/ actuator supply		60 mA
<b>AUX</b>		
Voltage		24 V (18 ... 30 V)
Max. current consumption		2.9 A
<b>Input</b>		
Number		8
Power supply		out of AUX
Sensor supply		short-circuit and overload protected according to EN 61131
Power supply of attached sensors	up to +25 °C	900 mA permanent operation <sup>(2)</sup>
	at +40 °C	900 mA permanent operation <sup>(2)</sup>
	at +55 °C	700 mA permanent operation <sup>(2)</sup>
	at +70 °C	600 mA permanent operation <sup>(2)</sup>
Switching threshold		U<5 V (low) U>15 V (high)
<b>Output</b>		
Number		8 x electronic
Power supply		out of AUX
Actuator supply		short-circuit and overload protected according to EN 61131
Max. output current	up to +25 °C	1000 mA per output, ∑ (O1 ... O4) 1000 mA + ∑ (O5 ... O8) 1000 mA <sup>(3)</sup>
	at +40 °C	900 mA per output, ∑ (O1 ... O4) 900 mA + ∑ (O5 ... O8) 900 mA <sup>(3)</sup>
	at +55 °C	750 mA per output, ∑ (O1 ... O4) 750 mA + ∑ (O5 ... O8) 750 mA <sup>(3)</sup>
	at +70 °C	500 mA per output, ∑ (O1 ... O4) 500 mA + ∑ (O5 ... O8) 500 mA <sup>(3)</sup>

<b>Article no.</b>	<b>BWU4265</b>
<b>Display</b>	
LED ASI/FLT 1 (red/green)	green: online red: offline yellow/red flashing: address 0
LED ASI/FLT 2 (red/green)	green: online red: offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(4)</sup> red flashing: ASi node 2 is switched off, because ASi node 1 is offline
LEDs I1 ... In (yellow)	state of inputs I1 ... I8
LEDs O1 ... On (yellow)	state of outputs O1 ... O8
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX
<b>Environment</b>	
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(5)</sup>
Operating altitude	max. 2000 m
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) <sup>(2)</sup> <sup>(3)</sup> <sup>(6)</sup> no condensation permitted
Storage temperature	-25 °C ... +85 °C
Housing	plastic, for DIN rail mounting
Pollution Degree	2
Protection category	IP20
Tolerable loading referring to humidity	according to EN 61131-2
Voltage of insulation	≥500 V
Weight	120 g
Dimensions (W / H / D in mm)	22.5 / 99 / 114 (without terminals)

(1) Loop resistance ≤150 Ω

(2)

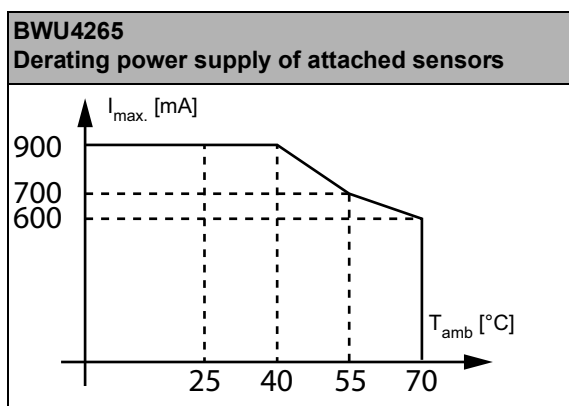

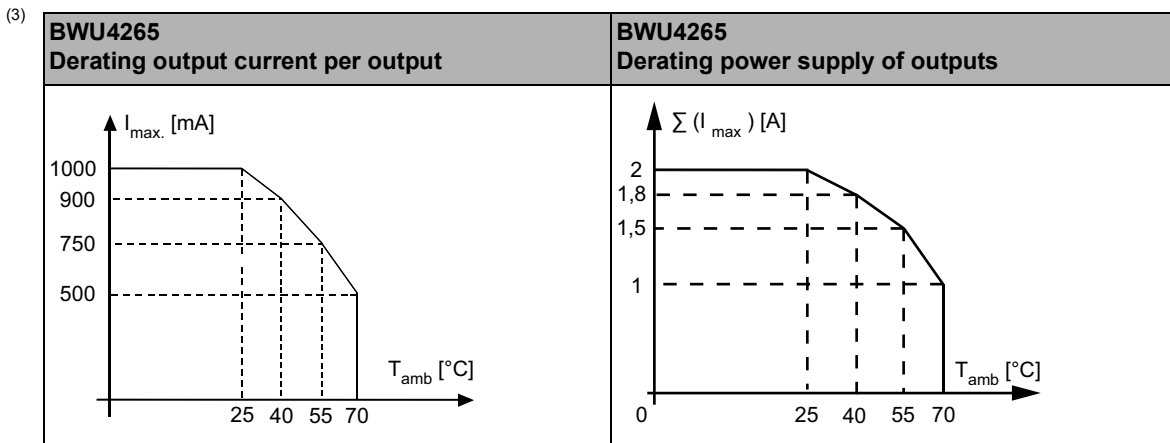

- (4) see table „peripheral fault indication“
- (5) The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.
- (6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

## Wiring rules

Push-in terminals, 2 /3 /4 poles (pitch 5 mm)	
<b>General</b>	
Nominal cross section	2.5 mm <sup>2</sup>
<b>Conductor cross section</b>	
Conductor cross section solid	0.2 ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 ... 2.5 mm <sup>2</sup>
Conductor cross section flexible, with ferrule	without plastic sleeve: 0.25 ... 2.5 mm <sup>2</sup> with plastic sleeve: 0.25 ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, with TWIN ferrules	without plastic sleeve: 0.5 ... 1.5 mm <sup>2</sup>
AWG	24 ... 14
Stripped insulation length	10 mm

UL-specifications (UL508)	
External protection	An isolated source with a secondary open circuit voltage of ≤30 V <sub>DC</sub> with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.


Article no.	Peripheral fault indication	
	Overload sensor supply	AUX voltage missing
BWU4265	-	•

Programming	Bit setting			
	D3	D2	D1	D0
	input			
BWU4265	ASi node 1: I4	ASi node 1: I3	ASi node 1: I2	ASi node 1: I1
	ASi node 2: I8	ASi node 2: I7	ASi node 2: I6	ASi node 2: I5
	output			
BWU4265	ASi node 1: O4	ASi node 1: O3	ASi node 1: O2	ASi node 1: O1
	ASi node 2: O8	ASi node 2: O7	ASi node 2: O6	ASi node 2: O5



Programming	Bit setting			
	parameter bit			
	P3	P2	P1	P0
<b>BWU4265</b>	not used	0 = on / 1 = off (synchronous I/O mode)	0 = on / 1 = off (data input filter 128 µs)	0 = on / 1 = off (watchdog)

## Connections


Name	Explanation
I <sub>x</sub>	digital input x
O <sub>x</sub>	digital output x
O <sub>x3</sub> , O <sub>x4</sub>	relay output x
I <sub>+</sub> , I <sub>-</sub> , I <sub>+</sub> <sub>n</sub> , I <sub>-</sub> <sub>n</sub>	sensor supply
O <sub>-</sub> <sub>n</sub>	GND for outputs (PNP)
O <sub>+</sub> <sub>n</sub>	GND for outputs (NPN)
AUX <sup>+</sup> <sub>ext.in</sub>	power supply, out of external voltage, positive pole (AUX, actuator supply)
AUX <sub>ext.in</sub>	power supply, out of external voltage, negative pole (AUX, actuator supply)
ASi +, ASi -	connection to ASi bus
ADDR	connection for ASi addressing device
n.c. (not connected)	not connected

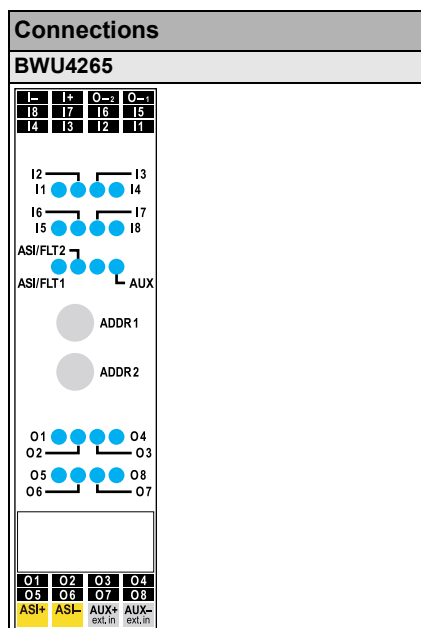

## Power supply (PNP) via the module (recommended):

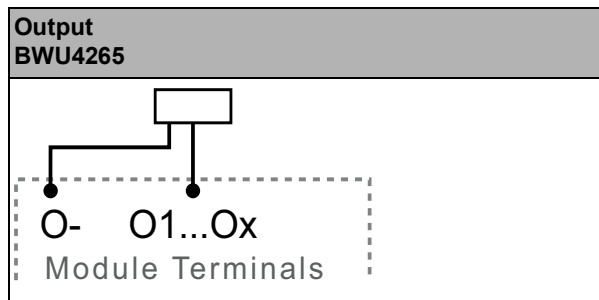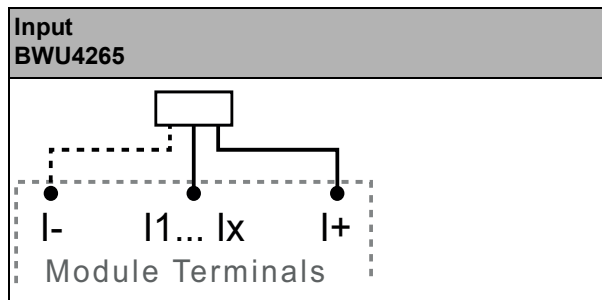

Separate power supply via external 24 V:

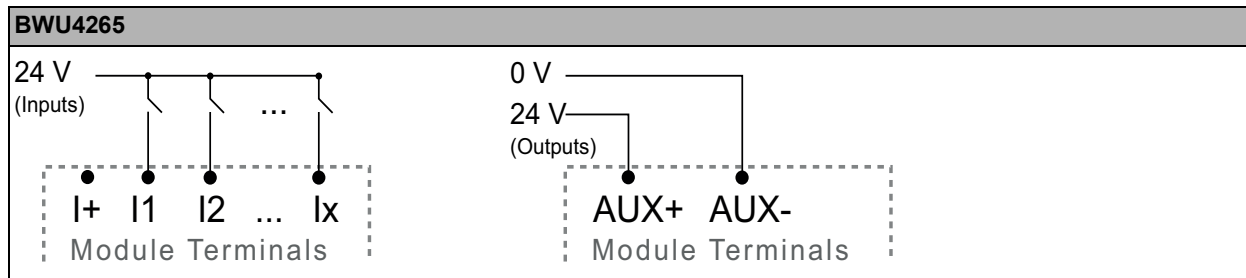

**Note**

To achieve passive safety, the device must be installed in a switching cabinet with protection class IP54.

**Accessories:**

- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)