

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

## ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

New standard ASi-5

ASi-5 master and ASi-3 master in one device

PROFIsafe and Safe Link in one device

- up to 450 devices

2 Master, PROFINET Slave

- ASi Safety input slaves report via PROFIsafe
- ASi Safety output slaves switch via PROFIsafe

Up to 64 release circuits

- up to 6 safe output circuits CAT4, SIL 3 on the Monitor  
safe relays or fast electronic safe outputs

Safe ASi outputs are supported

- up to 64 independent ASi outputs  
Multiple safe ASi outputs possible via a single ASi address

OPC UA server and integrated web server for simplified diagnostics

Selection of Mode of Safe Operation

Significantly improved response times

Safe speed and standstill monitoring


Applications up to category 4/PLe/SIL 3

Chip card for storage of configuration data



(Figure similar)



Figure	Type	Inputs Safety, SIL 3, cat. 4	Inputs safety, expandable to	Outputs Safety, SIL 3, cat. 4	Safety outputs, independent according to SIL 3, expandable to	Safety communication	Number of ASi networks, number of ASi Master <sup>(1)</sup>	1 power supply, 1 gateway for 2 ASi networks, inexpensive power supplies <sup>(2)</sup>	Diagnostic and configuration interface <sup>(3)</sup>	Article No.
	PROFIsafe, PROFINET, ASi-5 / ASi-3	3 x 2 channels	max. 62 x 2 channels, 1922 in max. configuration	6 release circuits; 6 x fast electronic safe outputs	max. 64, 1984 in max. configuration	PROFIsafe (F-CPU) + ASIMON program + Safe Link	2 ASi networks, 2 ASi masters	yes, max. 4A/ ASi network	Ethernet fieldbus; Ethernet diagnostics	BWU3674

<sup>(1)</sup> Number of ASi networks, number of ASi Master

"Single Master": 1 ASi network, 1 ASi Master.

"Double Master": 2 ASi networks, 2 ASi Masters.

"Optional ASi Safety coupling circuit": 2 ASi networks, 1 ASi Master.

<sup>(2)</sup> 1 power supply, 1 gateway for 2 ASi networks, inexpensive power supplies

"yes, max. 4A/ASi network": Cost-effective power for 2 ASi networks with 1 power supply.

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

<sup>(3)</sup> **Diagnostic and configuration interface**  
**"Ethernet fieldbus + Ethernet diagnostic"**: Access to ASi master and safety monitor via Bihl+Wiedemann proprietary software over Ethernet diagnostics interface or Ethernet fieldbus interface.

The latest version of the device description file of the gateway with integrated safety monitor is available in the "Downloads" section of the respective device.

<b>Article no.</b>	<b>BWU3674</b>
<b>Interface</b>	
PROFINET interface	2 x RJ-45, integrated 2-Port-Switch IRT capability Conformance Class B integrated switch complies with Conformance Class C (IRT capability)
Baud rates	10/100 MBaud
Function	PROFINET IO Device Media Redundancy Protocol (MRP) Shared Device
Card slot	chip card (512 kB) for storage of configuration data
<b>ASi</b>	
ASi specification	ASi-3 + ASi-5
Cycle time	<b>Cycle time ASi-3 (variable):</b> 150 $\mu$ s * (number of ASi-3 slaves + 2) <b>Cycle time ASi-5 (constant):</b> 1,27 ms for 384 bits input data + 384 bits output data
Operating voltage	30 V <sub>DC</sub> (20 ... 31,6 V) (PELV voltage)
ASi Power24V capability <sup>(1)</sup>	yes
<b>AUX</b>	
Operating voltage	24 V <sub>DC</sub> (19,2 ... 28,8 V)
Max current consumption	7,2 A
<b>Display</b>	
LCD	indication of slave addresses and error messages in plain text
LED PROFINET (green / red)	green: PROFINET communication active red: no PROFINET communication
LED power (green)	power on
LED config error (red)	configuration error
LED U ASi (green)	ASi voltage OK
LED ASi active (green)	ASi normal operation active
LED prg enable (green)	automatic addresses programming enabled
LED prj mode (yellow)	configuration mode active
LED AUX (green)	ASi power on and auxiliary power on
LEDs SI1 ... SI6 (yellow)	state of inputs: off: open on: close
LEDs SO1 ... SO6 (yellow)	state of outputs: off: open on: close
<b>UL-specifications (UL508)</b>	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30$ V <sub>DC</sub> with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.
Applied standards	EN 60529 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 62061, SIL 3 EN 61508, SIL 3 EN ISO 13849-1, Performance-Level e EN ISO 13849-2

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

<b>Article no.</b>	<b>BWU3674</b>
<b>Environment</b>	
Operating altitude	max. 2000 m
Ambient temperature	0 °C ... +55 °C
Storage temperature	-25 °C ... +85 °C
Housing	stainless steel, for DIN rail mounting
Pollution degree	2
Protection category	IP20
Maximum tolerable shock and vibration stress	according EN 61131-2
Voltage of insulation	≥ 500 V
Weight	800 g
Dimensions (W / H / D in mm)	109 / 120 / 106

**(1) ASi Power24V**

The device can be operated directly on a 24 V (PELV) power supply. The gateway has been optimized with integrated data coupling coils and adjustable self-resetting fuses for safe use of powerful 24 V power supplies.

<b>Article no.</b>	<b>BWU3674</b>
<b>Safety monitor</b>	
Start delay	< 10 s
Max. turn-off time	< 40 s
Antivalent switches for local inputs	yes
Standstill monitors for local inputs	6 axes up to 50 Hz <sup>(1)</sup>
Speed monitors for local inputs	3 to 6 axes up to 400 Hz <sup>(2)</sup>
<b>Connection</b>	
Connection	COMBICON
Length of connector cable	unlimited <sup>(3)</sup>
<b>Input</b>	
Inputs Safety	3 x 2 channels <sup>(4)</sup>
Inputs digital, EDM	up to 6 standard inputs <sup>(4)</sup>
Switching current	15 mA (T = 100 µs), continuously 4 mA at 24 V
Power supply	out of AUX
<b>Output</b>	
Number of release circuits on the monitor	6
Outputs	semiconductor output max. contact load: 1,2 A <sub>DC-13</sub> at 30 V, Σ = 7,2 A in sum <sup>(5)</sup>
Power supply (semiconductor outputs)	out of AUX
Test pulse (semiconductor outputs)	if output is on: minimum interval between 2 test pulses: 250 ms; maximum pulse width 1 ms

(1) connection at all SI or SO terminals possible.


(2) connection only at terminals SO1 ... SO6 configured as standard inputs (see "Variations of terminal configuration for BWU3674")

(3) loop resistance ≤ 150 Ω

(4) see "Variations of terminal configuration for BWU3674"

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor


(5)

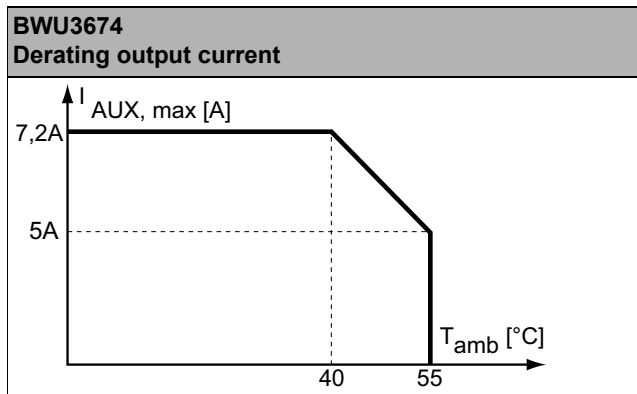

Article no.	Operating current		
	Master power supply, ca. 300 mA out of ASi circuits	Master power supply, max. 300 mA out of ASi circuit 1 (approx. 70 mA ... 300 mA), max. 300 mA out of ASi circuit 2 (approx. 70 mA ... 300 mA); in sum max. 370 mA	Version „1 gateway, 1 power supply, for 2 ASi networks“, approx. 300 mA (PELV voltage)
BWU3674	-	-	•

	BWU3674
Redundant power supply out of ASi: all fundamental functions of the device remain available even in case of power failure in one of the two ASi networks	-
Current measurement of the ASi circuits	•
Self-resetting adjustable fuses	•
ASi earth fault monitor distinguishes between ASi cable and sensor cable	•
In version „1 gateway, 1 power supply for 2 ASi circuits“: only 1 gateway + 1 ASi power supply is needed for both 2 ASi circuits	•

## Safety outputs block diagram BWU3674

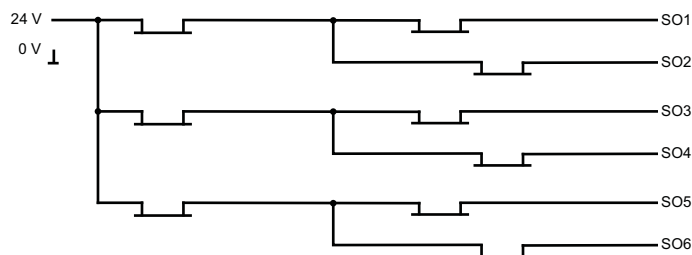

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

## Variations of terminal configuration for BWU3674

Terminal	Safe output	Safe input for mechanical contacts in combination with T1, T2 <sup>(1)</sup>	Safe antivalent input <sup>(1)</sup>	Safe electronic input <sup>(1)</sup>	Standard input <sup>(1)</sup>
SI1,2	–	•	•	•	•
SI3,4	–	•	•	•	•
SI5,6	–	•	•	•	•
SO1,2 <sup>(2)</sup>	•	•	•	–	•
SO3,4 <sup>(2)</sup>	•	•	•	–	•
SO5,6 <sup>(2)</sup>	•	•	•	–	•

<sup>(1)</sup> Inputs may only be supplied by the same 24 V source as the device itself.

<sup>(2)</sup> If outputs are configured as inputs, the input current has to be limited by an external element at ≤ 100mA

## Connections: Gateway + Safety Monitor:

BWU3674	Connection	Description
<p>The diagram shows the terminal block layout for the BWU3674. It is divided into 'Safe inputs / Standard inputs' and 'Safe outputs'. The top section includes terminals T1, T2, SI1-SI6. The bottom section includes terminals SO1-SO6, 24V, 0V, +ASI 1-, +ASI 1+, +ASI 2-, and +ASI +PWR- (max. 8A).</p>	SI1, SI3, SI5	Safe input terminal (T1)
	SI2, SI4, SI6	Safe input terminal (T2)
	T1	Clock output 1
	T2	Clock output 2
	SO1 ... SO6	Safe semiconductor outputs 1 ... 6
	24V, 0V	Power supply for local I/Os
	+ASI 1-, +ASI 2-	Connection of ASi circuits
	+ASI +PWR-	Power supply for Gateway and ASi networks

## Accessories:

- Safe contact expander, 1 or 2 independent channels (art. no. BWU2548 / BWU2539)
- Chip card, memory capacity 512 kB (art. no. BW4055)
- Bihl+Wiedemann Safety Suite - Safety Software for Configuration, Diagnostics and Commissioning (art. no. BW2916)
- Power supplies, e.g.: ASi power supply, 4 A (art. no. BW1649), ASi power supply, 8 A (art. no. BW1997)  
(further power supply units can be found at [www.bihl-wiedemann.de/en/products/accessories/power-supplies](http://www.bihl-wiedemann.de/en/products/accessories/power-supplies))
- PROFINET Master simulator Plus (art. no. BW3057)
-