


Passive distributor ASi/AUX as profile cable branch

2 x ASi profile cable

2 x AUX profile cable

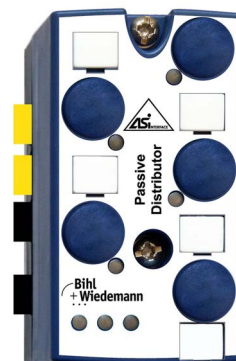


(figure similar)



Article no.	BWU4729
Connection	
Profile cable, piercing technology	2 x ASi and 2 x AUX
Operating voltage	≤ 35V
Operating current	profile cable, piercing technology: ≤ 8A
Environment	
Applied standards	EN 61000-6-2 EN 61000-6-3
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽¹⁾
Operating altitude	max. 2000 m
Ambient operating temperature	-30 °C ... +70 °C
Storage temperature	-30 °C ... +85 °C
Protection category (EN 60529)	IP67
Allowed shock and vibration stress	≤15 g, T≥11 ms 10 ... 55 Hz, 0,5 mm amplitude
Voltage of insulation	≥500 V
Dimensions (W / H / D) in mm	45 / 80 / 42

⁽¹⁾ The passive distributor is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

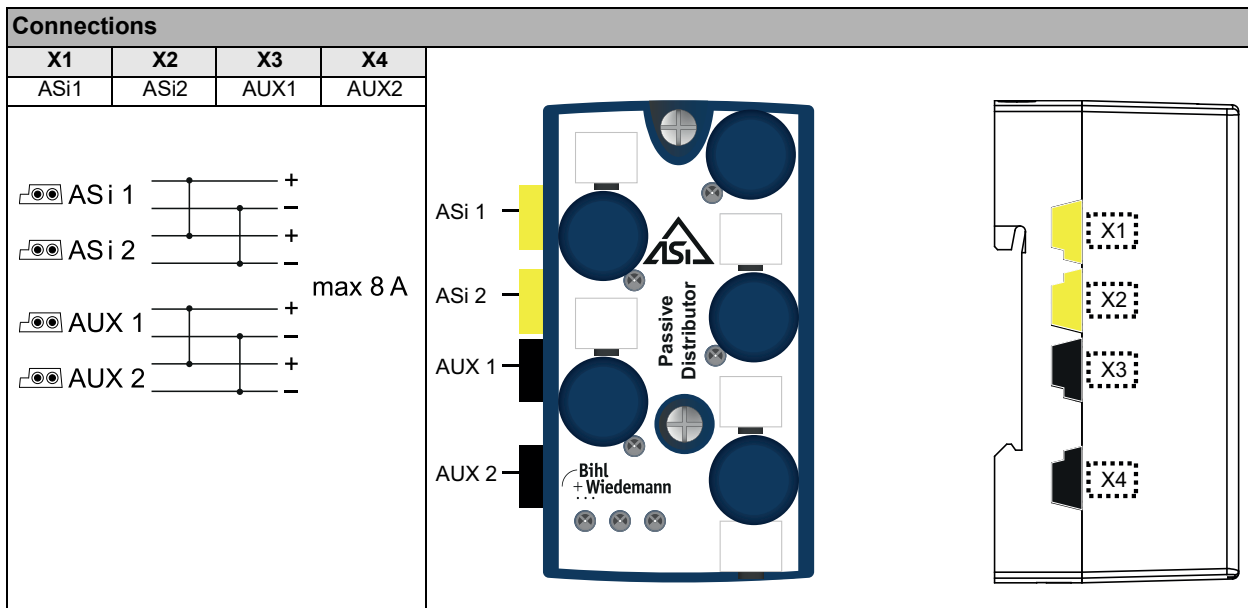

Accessories:

- ASi substructure module for 4-channel module in 45 mm-housing (art. no. BW2349)
- ASi substructure module (CNOMO) 4-channel module in 45 mm-housing (art. no. BW2350)