

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

Bihl  
+ Wiedemann  
...

**ASi-5 – Great data bandwidth, short cycle times**

**Compatible with all ASi generations**

**Safety Monitor supports ASi-5 Safety and ASi-3 Safety**

**PROFIsafe and Safe Link in one device**

- up to 450 devices

**2 ASi-5/ASi-3 Master, PROFINET node**

- ASi Safety input nodes report via PROFIsafe
- ASi Safety output nodes switch via PROFIsafe



(Figure similar)

**Safe ASi outputs are supported**

- up to 32 independent ASi outputs  
Multiple safe ASi outputs possible via a single ASi address

**OPC UA server and integrated web server for simplified diagnostics**

**Selection of Mode of Safe Operation**

**Applications up to category 4/PLe/SIL 3**

**Chip card for storage of configuration and additional data**



Figure	Fieldbus Interface	Safety communication	Inputs Safety, SIL 3, cat. 4	Outputs Safety, SIL 3, cat. 4	Inputs safety, expandable to	Safety outputs, independent according to SIL 3, expandable to	ASi Safety	Number of ASi networks, number of ASi Master <sup>(1)</sup>	Integrated decoupling, ASi current measurement in the gateway <sup>(2)</sup>	Diagnostic and configuration interface <sup>(3)</sup>	Article No.
	PROFINET, OPC UA	PROFIsafe (F-CPU) + Safe Link	-	-	max. 62 x 2 channels, 1922 in max. configuration	max. 64, 1984 in max. configuration	ASi-5 Safety and ASi-3 Safety compatible	2 ASi networks, 2 ASi-5/ASi-3 Masters	yes, max. 4A/ASi network	Ethernet fieldbus; Ethernet diagnostics	BWU3973

<sup>(1)</sup> Number of ASi networks, number of ASi Master

„Double Master“: 2 ASi networks, 2 ASi-5/ASi-3 Masters.

<sup>(2)</sup> Integrated decoupling, ASi current measurement in the gateway

“yes, max. 4A/ASi network”: Data decoupling integrated in the gateway. Cost-effective power for 2 ASi networks with 1 power supply (optionally supply of multiple Single Gateways by 1 power supply). Operation with short cable lengths with standard 24 V power supply possible.

<sup>(3)</sup> Diagnostic and configuration interface

“Ethernet fieldbus + Ethernet diagnostic”: Access to ASi master and safety monitor via Bihl+Wiedemann proprietary software over Ethernet diagnostics interface or Ethernet fieldbus interface.

The latest version of the device description file of the gateway with integrated safety monitor is available in the “Downloads” section of the respective device.

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

<b>Article no.</b>	<b>BWU3973</b>
<b>Fieldbus Interface</b>	
Type	PROFINET; 2 x RJ-45, integrated 2-Port-Switch IRT capability Conformance Class B, integrated switch complies with Conformance Class C (IRT capability)
Baud rates	10/100 MBaud
OPC UA interface	OPC UA server + web server
Safety communication	PROFIsafe (F-CPU) + Safe Link
Function	PROFINET IO Device Media Redundancy Protocol (MRP) Shared Device
Card slot	chip card (BW4785) for storage of configuration and additional data
<b>Diagnostic Interface</b>	
Type	Ethernet; RJ-45 acc. to IEEE 802.3
Baud rates	10/100 MBaud half duplex/ full duplex
OPC UA interface	OPC UA server + web server
Safety communication	Safe Link
<b>ASi</b>	
ASi specification	ASi-5 + ASi-3
Cycle time	<b>Cycle time ASi-5 (constant):</b> 1,27 ms for 384 bits input data + 384 bits output data <b>Cycle time ASi-3 (variable):</b> 150 µs * (number of ASi-3 nodes + 2)
ASi Safety	ASi-5 Safety and ASi-3 Safety compatible
Operating voltage	30 V <sub>DC</sub> (20 ... 31,6 V) (PELV voltage)
Operating current	300 mA
Current per ASi circuit	up to 30 °C      4 A per ASi circuit at 40 °C      4 A per ASi circuit at 55 °C      4 A per ASi circuit
ASi Power24V capability <sup>(1)</sup>	yes
Length of the ASi line	when supplied via 24 V power supply unit: max. 50 m when supplied via 30 V power supply unit: max. 100 m for ASi-3 / max. 200 m for ASi-5
<b>AUX</b>	
Operating voltage	–
Max current consumption	–
<b>Display</b>	
LCD	indication of ASi addresses and error messages in plain text
LED PROFINET (green / red)	green: PROFINET communication active red: no PROFINET communication
LED power (green)	power on
LED config error (red)	configuration error
LED U ASi (green)	ASi voltage OK
LED ASi active (green)	ASi normal operation active
LED prg enable (green)	automatic address programming enabled
LED prj mode (yellow)	configuration mode active
LED AUX (green)	–
<b>UL-specifications (UL508)</b>	
External protection	An isolated voltage source with a PELV/SELV voltage ≤30 V <sub>DC</sub> must have internal or external current limiting
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor

**Bihl  
+ Wiedemann**


Article no.	BWU3973
<b>Environment</b>	
Applied standards	EN 60529 EN 62026-2 EN 61000-6-2 EN 61000-6-4 EN 62061, SIL 3 EN 61508, SIL 3 EN ISO 13849-1, Performance-Level e EN ISO 13849-2
Operating altitude	max. 2000 m
Ambient temperature	-25 °C ... +55 °C (no condensation permitted)
Storage temperature	-25 °C ... +85 °C
Housing	stainless steel, for DIN rail mounting
Pollution degree	2
Protection category	IP20
Maximum tolerable shock and vibration stress	according EN 61131-2
Voltage of insulation	≥ 500 V
Weight	800 g
Dimensions (W / H / D in mm)	85 / 120 / 106

**(1) ASi Power24V**

The device can be operated directly on a 24 V (PELV) power supply. The gateway has been optimized with integrated data coupling coils and adjustable self-resetting fuses for safe use of powerful 24 V power supplies.

	BWU3973
<b>Data decoupling integrated in the gateway</b>	•
<b>Redundant power supply out of ASi: all fundamental functions of the device remain available even in case of power failure in one of the two ASi networks</b>	-
<b>Current measurement of the ASi circuits</b>	•
<b>Self-resetting adjustable fuses</b>	•
<b>ASi earth fault monitor distinguishes between ASi cable and sensor cable</b>	•
<b>Cost-effective power for 2 ASi networks with 1 power supply</b>	•

## Connections

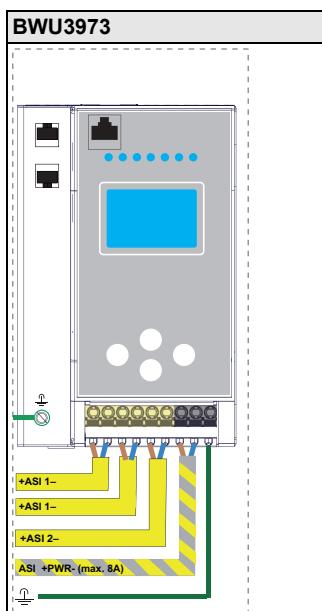

# ASi-5/ASi-3 PROFIsafe via PROFINET Gateway with integrated Safety Monitor



## Accessories:

- Safe contact expander, 1 or 2 independent channels (art. no. BWU2548 / BWU2539)
- Chip card for storage of configuration and additional data, memory capacity ≥16 GB (art. no. BW4785)
- Bihl+Wiedemann Safety Suite - Safety Software for Configuration, Diagnostics and Commissioning (art. no. BW2916)
- Power supplies, e.g.: 30 V power supply, 4 A, 1 phase (art. no. BW4218), 30 V power supply, 8 A, 1 phase (art. no. BW4219), 30 V power supply, 8 A, 3 phases (art. no. BW4220), 30 V Power Supply, 16 A, 1 phase (art. no. BW4221), 30 V Power Supply, 16 A, 3 phases (art. no. BW4222) (for further power supply units visit [www.bihl-wiedemann.de/en/products/accessories/power-supplies](http://www.bihl-wiedemann.de/en/products/accessories/power-supplies))
- PROFINET Master Simulators Licenses (art. no. BW4754, BW4755)