

## AS-i/IO-Link Modules now even better

The AS-i/IO-Link modules from Bihl+Wiedemann now work even better with the IO-Link devices from many vendors – including binary actuators and sensors as well as analog sensors. Profit from the improved interoperability of the modules with IP67 protection and 4 IO-Link Class A Ports (BWU2853) or 4 IO-Link Class B Ports (BWU3020).

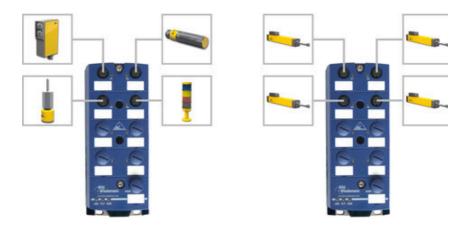


Fig.: AS-i/IO-Link Modules, IO-Link Master – available with 4 IO-Link Ports Class A (BWU2853) or Class B (BWU3020) – perfect compatibility with the IO-Link products from many manufacturers

## AS-i/IO Link Modules

- Improved interoperability with IO-Link products from many manufacturers
- Master with 4 IO-Link Ports
- 2 single slaves in one housing
- IO-Link Class A (BWU2853) or IO-Link Class B (BWU3020)
- IO-Link ports are supplied via AUX (BWU2853) or AS-i (BWU3020)

© 2015 Bihl+Wiedemann GmbH, Mannheim - Germany