

Come and see us at Hannover Messe!

The time is near: the Hannover Messe 2016 opens its gates again. We would like to introduce our new products to you and cordially invite you to visit our **booth H01 in hall 9** at the exhibition.

AS-i Safety scores points with unique efficiency benefits in combination with failsafe controllers. The system has long played to its strengths in applications with strictly hierarchical safety technology - now an innovation offensive from Bihl+Wiedemann enables friends of decentralized structures to profit more than ever. The newest highlight is the **AS-i Safety PROFIsafe Gateway (BWU3367)** with integrated Safe Link for safe coupling.

Further information can be found within our [latest edition of the AS-Interface Master News Magazine](#) under the heading "**Along and Across**".

Would you like to experience live our ideas and new products? You are welcome to visit us from **April 25-29, 2016** at our **booth H01 in hall 9**.



Fig.1: AS-i Safety PROFIsafe Gateway with integrated Safe Link for safe coupling (BWU3367)

Some of our highlights

Motor Modules optimized for use in the cable duct (BW3278, BW3290)

For 2 x 24 V Itoh Denki (BW3278) or Interroll / RULMECA Motorized Rollers (BW3290):

- Very flat design of motor module (W x H x D: 90 x 60 x 18 mm) and passive

distributor (W x H x D: 60 x 45 x 19 mm)

- Module fits perfectly in cable duct

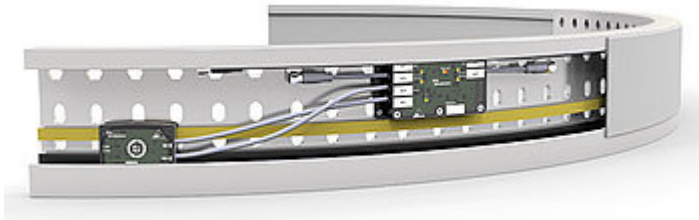


Fig. 2: Motor Module (BW3278, BW3290) in the cable duct

New Active Distributor for OSSD outputs (BW3299)

Two-channel safe input for connecting OSSD outputs

- Very flat design (W x H x D: 90 x 60 x 18 mm)
- Can be installed in cable duct
- 2 x flat cable for connecting AS-i and AUX, sensor connected via cable with M12 sockets, right-angled, 5-pin



Fig. 3: Active distributor (BW3299)

New AUX Passive Distributors (BW3306, BW3307)

Up to 16 A / 20 A possible, depending on black AUX flat cable used

- 2 x round cable / connection leads 2.5 mm² for powering from AUX (24 V auxiliary power) (BW3307) or
- 2 x connections for profile cables AUX as profile cable branch (BW3306)



Fig. 4 : AUX Passive Distributors (BW3306, le., BW3307, ri.)

We also offer you

A large selection of safety products to solve your safety applications:

- Gateways with integrated Safety Monitor, e.g. for POWERLINK (BWU3176, BWU3177)
- Safety I/O Modules (many of them rated to -30 °C)
- Special Modules, e.g. Speed Monitor for one axis (BW2868) and safe Analog Modules (e.g. BWU3271)
- Software, e.g. Safety software for configuration, diagnosis and programming

We are looking forward to meeting you in Hanover at our **booth H01 in hall 9**.

Would you like to visit our booth at Hanover but still need a ticket? Please come as our guest. After [registering](#) you will receive a personalized e-ticket via email.