



2 x 2 connectors for profile cable

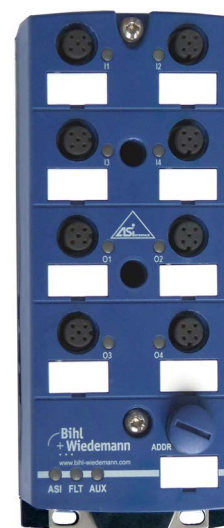

(Figure similar)





Figure	Type	Inputs digital	Outputs digital	M12 connection ⁽¹⁾	Input voltage (sensor supply) ⁽²⁾	Output voltage (actuator supply) ⁽³⁾	ASi connection ⁽⁴⁾	ASi address ⁽⁵⁾	Max. output current	Art. no.
	IP67, 8 x M12	4	4 x electronic	Single	out of ASi	out of AUX	ASi profile cable	1 Single address	1 A per output	BWU4383

- (1) **M12 wiring:**
Single wiring: 1 input or output per connection.
Y wiring: 2 inputs or outputs per connection.
Mixed wiring: 1 input and 1 output per connection.
- (2) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (3) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential.
- (4) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).
- (5) **ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed.
 For modules with two ASi nodes the second ASi node is turned off as long as the first ASi node is addressed to address "0".
 Upon request, ASi node are available with specific ASi address profiles.

Article No.		BWU4383
General data		
Device type		input / output
Connection		
ASi/AUX Connection		profile cable and piercing
Periphery connection		M12, Single-wiring
Length of connector cable		unlimited ⁽¹⁾
ASi		
Profile		S-7.F.F (ID1=F default)
Address		1 Single address
Required Master profile		≥M0
As of ASi specification		2.0
Operating voltage		30 V (18 ... 31.6 V)
Max. current consumption		165 mA
Max. current consumption without sensor/ actuator supply		45 mA
AUX		
Operating voltage		24 V (18 ... 30 V)
Max. current consumption		3 A
Input		
Number		4
Power supply		out of ASi
Sensor supply		short-circuit and overload protected according to EN 61131-2
Power supply of attached sensors	up to +40 °C	120 mA ⁽²⁾
	at +55 °C	100 mA ⁽²⁾
	at +70 °C	80 mA ⁽²⁾
Switching threshold		U < 5 V (low) U > 15 V (high)
Output		
Number		4
Power supply		out of AUX
Output		short-circuit and overload protected according to EN 61131-2
Max. output current	up to +40 °C	1 A per output, $\sum(\text{Out}) 3 \text{ A}^{(3)}$
	at +55 °C	
	at +70 °C	1 A per output, $\sum(\text{Out}) 2 \text{ A}^{(3)}$
Display		
LED ASi (green)		on: ASi voltage on flashing: ASi voltage on, but peripheral fault ⁽⁴⁾ or address 0 off: no ASi voltage
LED FLT/FAULT (red)		on: ASi address 0 or ASi node offline flashing: peripheral fault ⁽⁴⁾ off: ASi node online
LED AUX (green)		on: 24 V _{DC} AUX off: no 24 V _{DC} AUX
LEDs I1 ... In (yellow)		state of inputs I1 ... I4
LEDs O1 ... On (yellow / red)		yellow: state of outputs O1 ... O4 red: overload

Article No.	BWU4383
Environment	
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes ⁽⁵⁾
Operating altitude	max. 2000 m
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) ⁽²⁾ ⁽³⁾ ⁽⁶⁾
Storage temperature	-30 °C ... +85 °C
Housing	plastic, for screw mounting
Pollution degree	2
Protection category	IP67 ⁽⁷⁾
Tolerable loading referring to humidity	according to EN 61131-2
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2
Insulation voltage	≥500 V
Weight	200 g
Dimensions (W / H / D) in mm	60 / 151 / 31

(1) Loop resistance ≤150 Ω

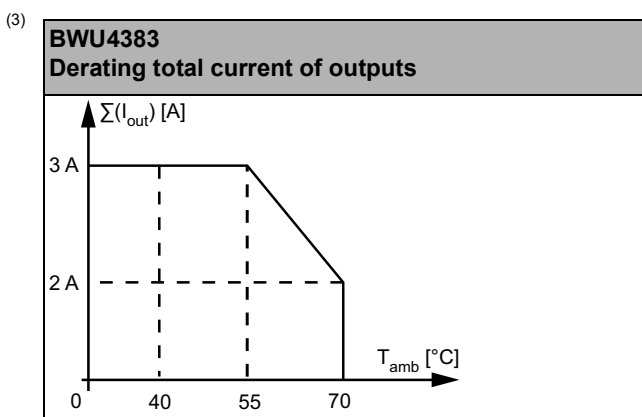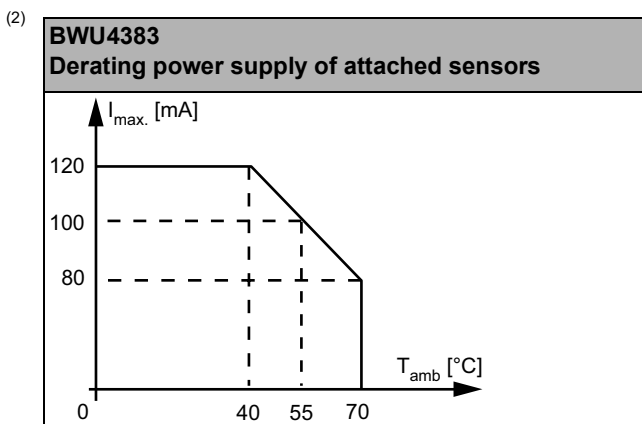


(4) See table "Peripheral fault indication"

(5) The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(6) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(7) Protection category IP67 can only be achieved if all open connetions are sealed with suitable end caps fulfilling the same protection category.

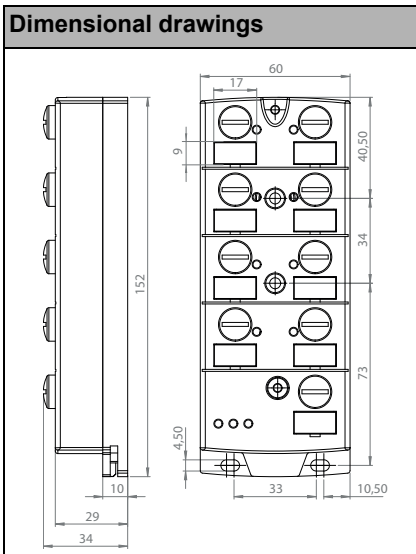

UL-specifications (UL508)	
BWU4383	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU4383	•	•	-

Programming	ASi bit assignment			
	D3	D2	D1	D0
	input			
BWU4383	I4	I3	I2	I1
	output			
BWU4383	O4	O3	O2	O1



Programming	Parameter bits			
	P3	P2	P1	P0
BWU4383	not used	0= on / 1= off (synchronous I/O mode)	0= on / 1= off (data input filter 128 μ s)	0= off / 1= on (Watchdog)

Pin assignment



Signal name	Explanation
Ix	digital input x
Ox	digital output x
24V _{ext out}	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V _{ext out}	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V _{out of ASi}	power supply, out of ASi, positive pole (sensor supply)
0V _{out of AS}	power supply, out of ASi, negative pole (sensor supply)
ASi+, ASi-	connection to ASi bus
n.c. (not connected)	not connected

Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU4383	X1	I1	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I1	n.c.
	X2	I2	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I2	n.c.
	X3	I3	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I3	n.c.
	X4	I4	24 V _{out of ASi}	n.c.	0 V _{out of ASi}	I4	n.c.
	X5	O1	0 V _{ext out}	n.c.	0 V _{ext out}	O1	n.c.
	X6	O2	0 V _{ext out}	n.c.	0 V _{ext out}	O2	n.c.
	X7	O3	0 V _{ext out}	n.c.	0 V _{ext out}	O3	n.c.
	X8	O4	0 V _{ext out}	n.c.	0 V _{ext out}	O4	n.c.
	ADDR (protection cap)	connection for ASi-3 addressing plug					

Mounting according to cable direction

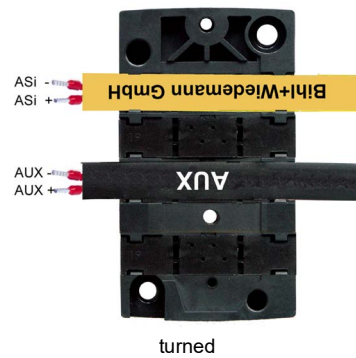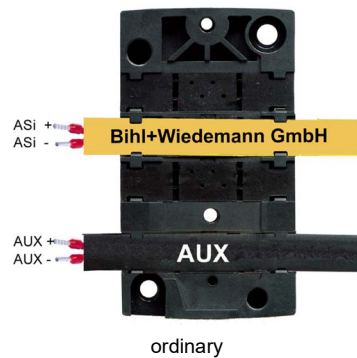

Line termination with sealing profiles / as junction

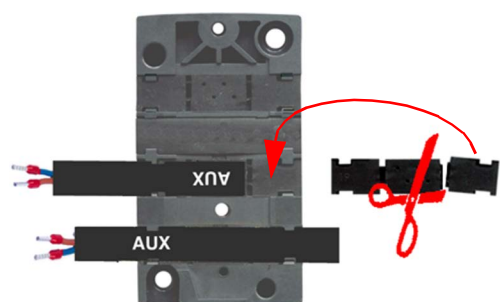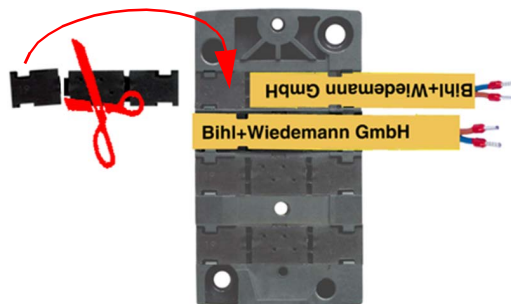

Accessories:

- ASi substructure module (CNOMO) for 8 channel module in 60 mm housing (art. no. BWU2351)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4708)